
REVISIONS				
REV.	ZONE	DESCRIPTION	DATE	INITIAL
1	7D	ADDED NOTE 1.	04/16/15	M.S.

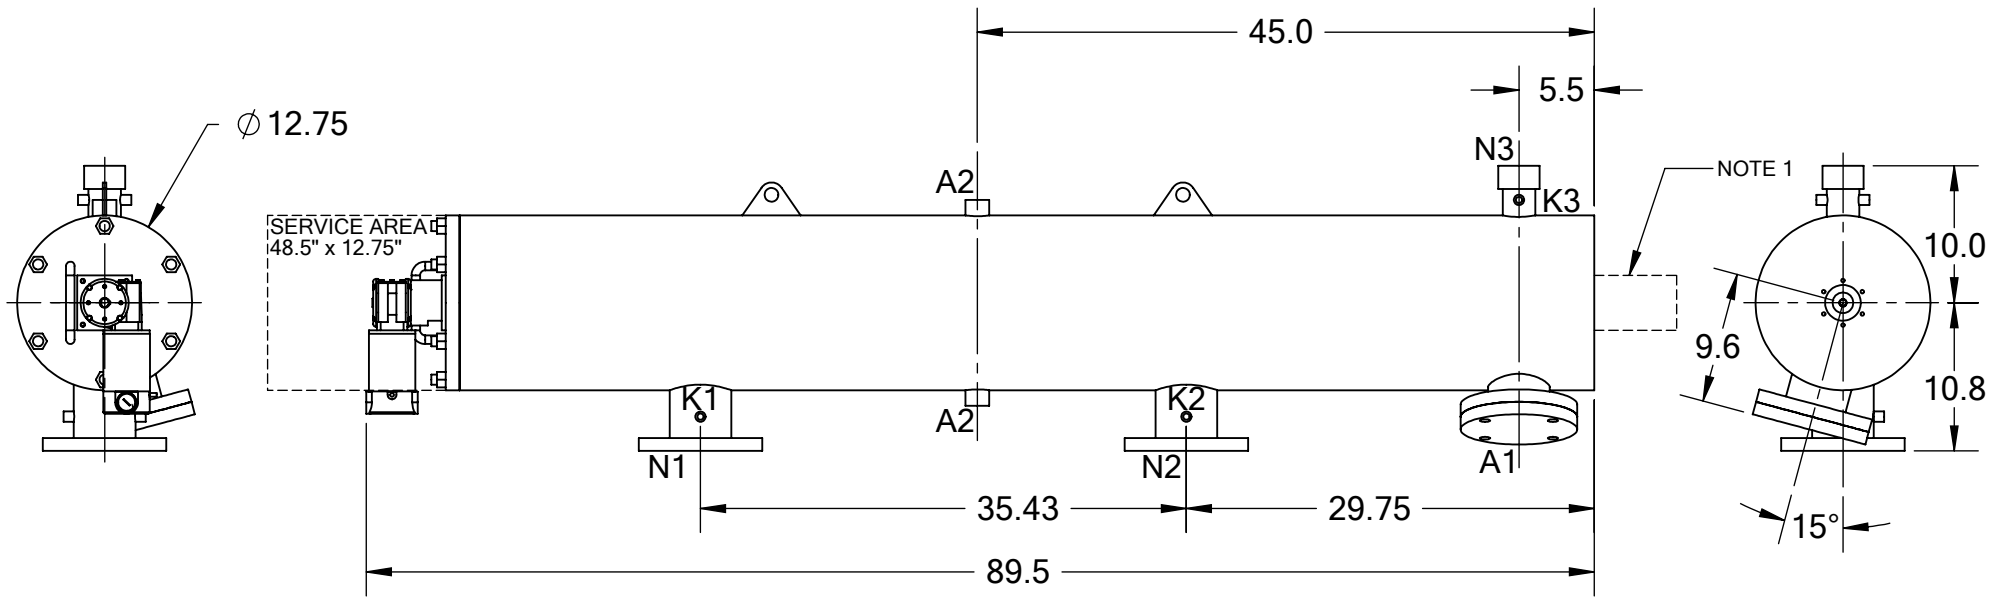

TECHNICAL DATA	
FLOW RATE	MAX. 800 GPM (182 m^3/hr)
SCREEN SIZE	___ MICRON
SCREEN AREA	8.0 SQ. FEET
DESIGN TEMPERATURE	160 °F
DESIGN PRESSURE	150 PSI
EMPTY WEIGHT	~325 LBS.
FULL WEIGHT	~625 LBS.

NOTES:

1. PLEASE ALLOW ~20" ADDITIONAL TO INSTALL AND REMOVE THE PISTON ASSEMBLY TO THE BACKSIDE OF THE FILTER.

NOZZLE	CONNECTION	TYPE	SIZE	RATING
A1	SERVICE PORT	FLANGED	3.5" ASA	CL. #150 F.F. w/ Blind
A2	PRESSURE RELEASE	THREADED	1" NPT(2)	
K1	HIGH PRESSURE CONN.	THREADED	1/4" NPT(2)	
K2	LOW PRESSURE CONN.	THREADED	1/4" NPT(2)	
K3	HYDRAULIC CONN.	THREADED	1/4" NPT(2)	
N1	INLET	FLANGED	4" ASA	CLASS #150 F.F.S.O.
N2	OUTLET	FLANGED	4" ASA	CLASS #150 F.F.S.O.
N3	FLUSH OUTLET	THREADED	2" NPT	

TOLERANCES
(UNLESS OTHERWISE SPECIFIED)

FRAC. ±1/16
.X ±.1
.XX ±.05
.XXX ±.010
ANGLE ±1°

FLTR Purple Engineering

MATERIAL: SST

DRAWN BY: S. PERKINSON

DATE: 04/12/12

SCALE: 1:14 SHEET: 1 OF 1

TITLE: LPF4-XLP FILTER, CUT DRAWING

DRAWING NUMBER: LPF-4XLP-CUT-01

REV: 1

For more information: **WEB**: FLTR.com.au **PHONE**: (+61) 1300 62 4020 **EMAIL**: info@FLTR.com.au **SKYPE**: Purple.Engineering