TEKLEEN™

The Next Generation in Water Filtration



THE GB5 - B CONTROLLER

Automatic Filters, Inc. features state of the art electronic backwash controllers in the GB series. Complete with a 3 - way latching solenoid, a D/P switch, a programmed PC, a 9 volt battery, the GB5-B controller combines many convenient features into a compact integral unit. The filters can be cleaned in 2 different modes: D/P and manual. The solenoid needs to be energized to open the flushing valve.

Available Features

D/P rinsing 5 or 10 seconds
Manual backflush
Compact assembly
Weather-proof, UV resistant plastic protective case

Specifications


Input: 9 VDC small battery
Dimensions:4”L X 4”W X 8”H
Weight: 2lbs
Up to 3,000 backwash cycles


For more information:
WEB: FLTR.com.au **PHONE:** (+61) 1300 62 4020 **EMAIL:** info@FLTR.com.au **SKYPE:** Purple.Engineering

FLTR Purple Engineering


BERMAD LATCHING SOLENOID FLUSHING VALVE CONNECTION


SINGLE CHAMBER VALVES

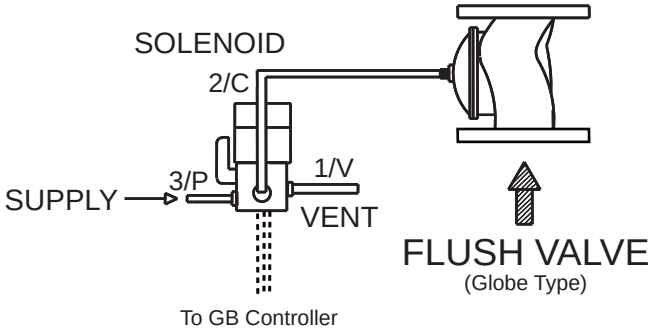

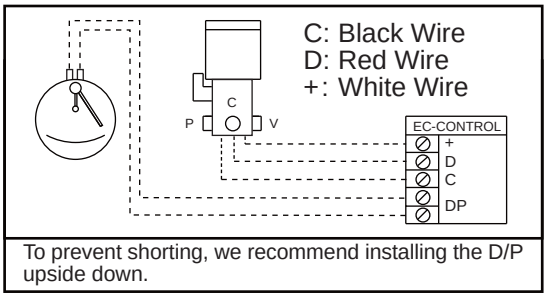



To prevent shorting, we recommend installing the D/P upside down.

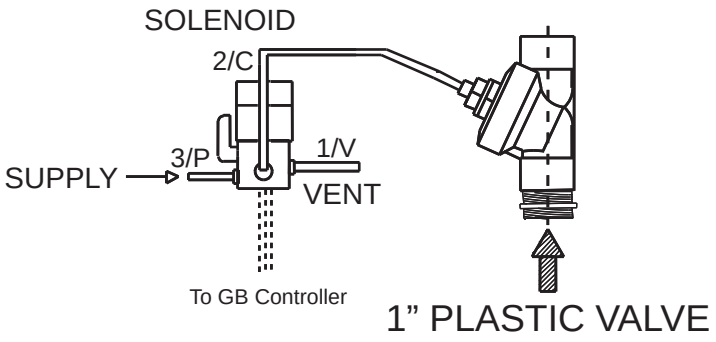

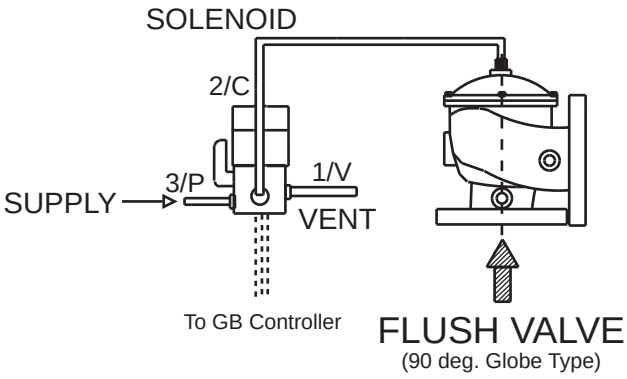


DUAL CHAMBER VALVES

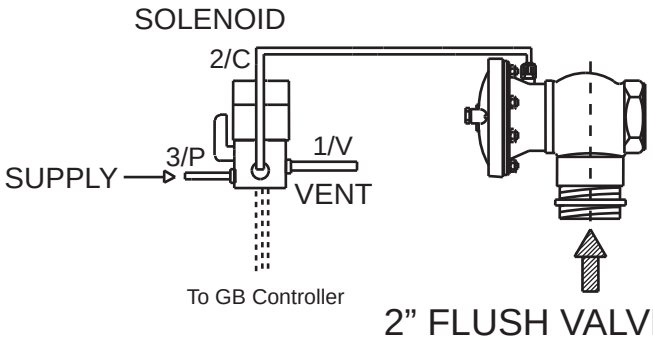

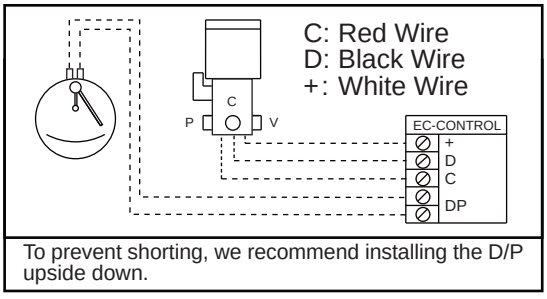

To prevent shorting, we recommend installing the D/P upside down.

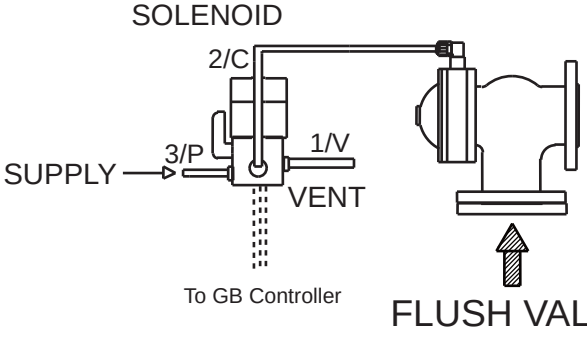

For more information:

WEB: FLTR.com.au **PHONE:** (+61) 1300 62 4020 **EMAIL:** info@FLTR.com.au **SKYPE:** Purple.Engineering

FLTR Purple Engineering